


Wireless Setup

Comtrend WR-6891u



Step 1:

Open a browser. (Safari, Google, Firefox, etc.)
In the address bar type 192.168.1.1; Hit enter.

A sign in screen will pop up.

Username: user Password: veiwonly1

Click Sign in


This will get you into the router.

Sign in

http://192.168.1.1
Your connection to this site is not private

Username

Password

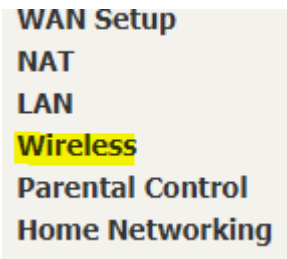


Step 2:

Click the "Basic Setup" icon.

On the left hand side of the screen select the "Wireless" option

Then select "Basic"

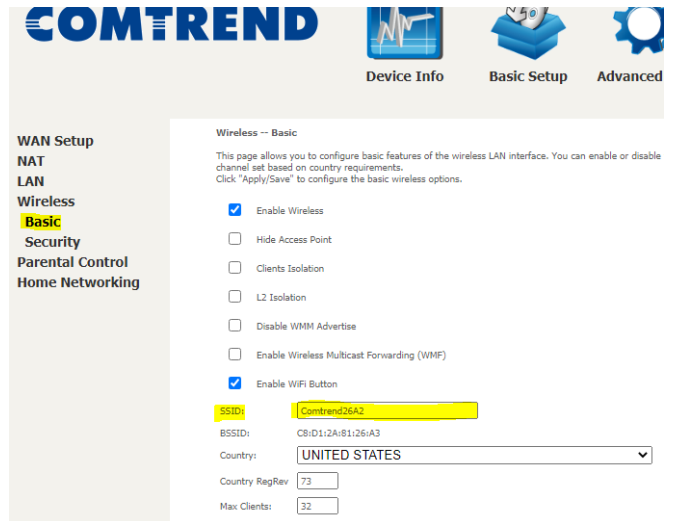

Step 3:

We are finally change your SSID !

Simply go to the SSID section of this page (roughly half way down the page) and type whatever you want your personalized SSID to be.

BE SURE TO CLICK APPLY/SAVE AT THE VERY BOTTOM OF THE SCREEN!

SSID:
 BSSID:
 Country:
 Country RegRev:
 Max Clients:

Enabled	SSID
<input type="checkbox"/>	iw10_Guest1
<input type="checkbox"/>	iw10_Guest2
<input type="checkbox"/>	iw10_Guest3
<input type="checkbox"/>	iw10_Guest4
<input type="checkbox"/>	iw10_Guest5
<input type="checkbox"/>	iw10_Guest6
<input type="checkbox"/>	iw10_Guest7

through Wi-Fi Protected Setup (WPS)
 Note: When both STA PIN and Authorized MAC are empty, PBC is used. If Hide Access Point enabled

WPS Setup

Enable WPS

Manual Setup AP

You can set the network authentication method, selecting data encryption, specify whether a network key is required to authenticate to this wireless network and specify the Click "Apply/Save" when done.

Select SSID:

Network Authentication:


Protected Management Frames:

WPA/WAPI passphrase: [Click here to display](#)

WPA Group Rekey Interval:

WPA/WAPI Encryption:

WEP Encryption:



Step 4: Changing your password

Click on "Basic Setup"

Click on "Wireless"

Click on "Security"

Go to the WPA/WAPI passphrase section; Type your new password

BE SURE TO CLICK APPLY/SAVE AT THE VERY BOTTOM OF THE SCREEN!

YOUR ARE DONE!! CONGRATULATIONS!!!